



BRDR. CHRISTENSENS
CREATING QUALITY VALVES WORLDWIDE
A BLISS ANAND GROUP COMPANY

Lubricated Taper Plug Valve


Creating quality valves worldwide







About Brdr. Christensens

Brdr. Christensens is a world-leader in the creation of lubricated plug valves. We deliver valves to all major oil and gas companies in the world, where they are used on onshore, offshore and on large gas transmission and compressor stations. Founded in 1958 in Haslev, Denmark, we have over 60 years of experience and numerous industry certifications.

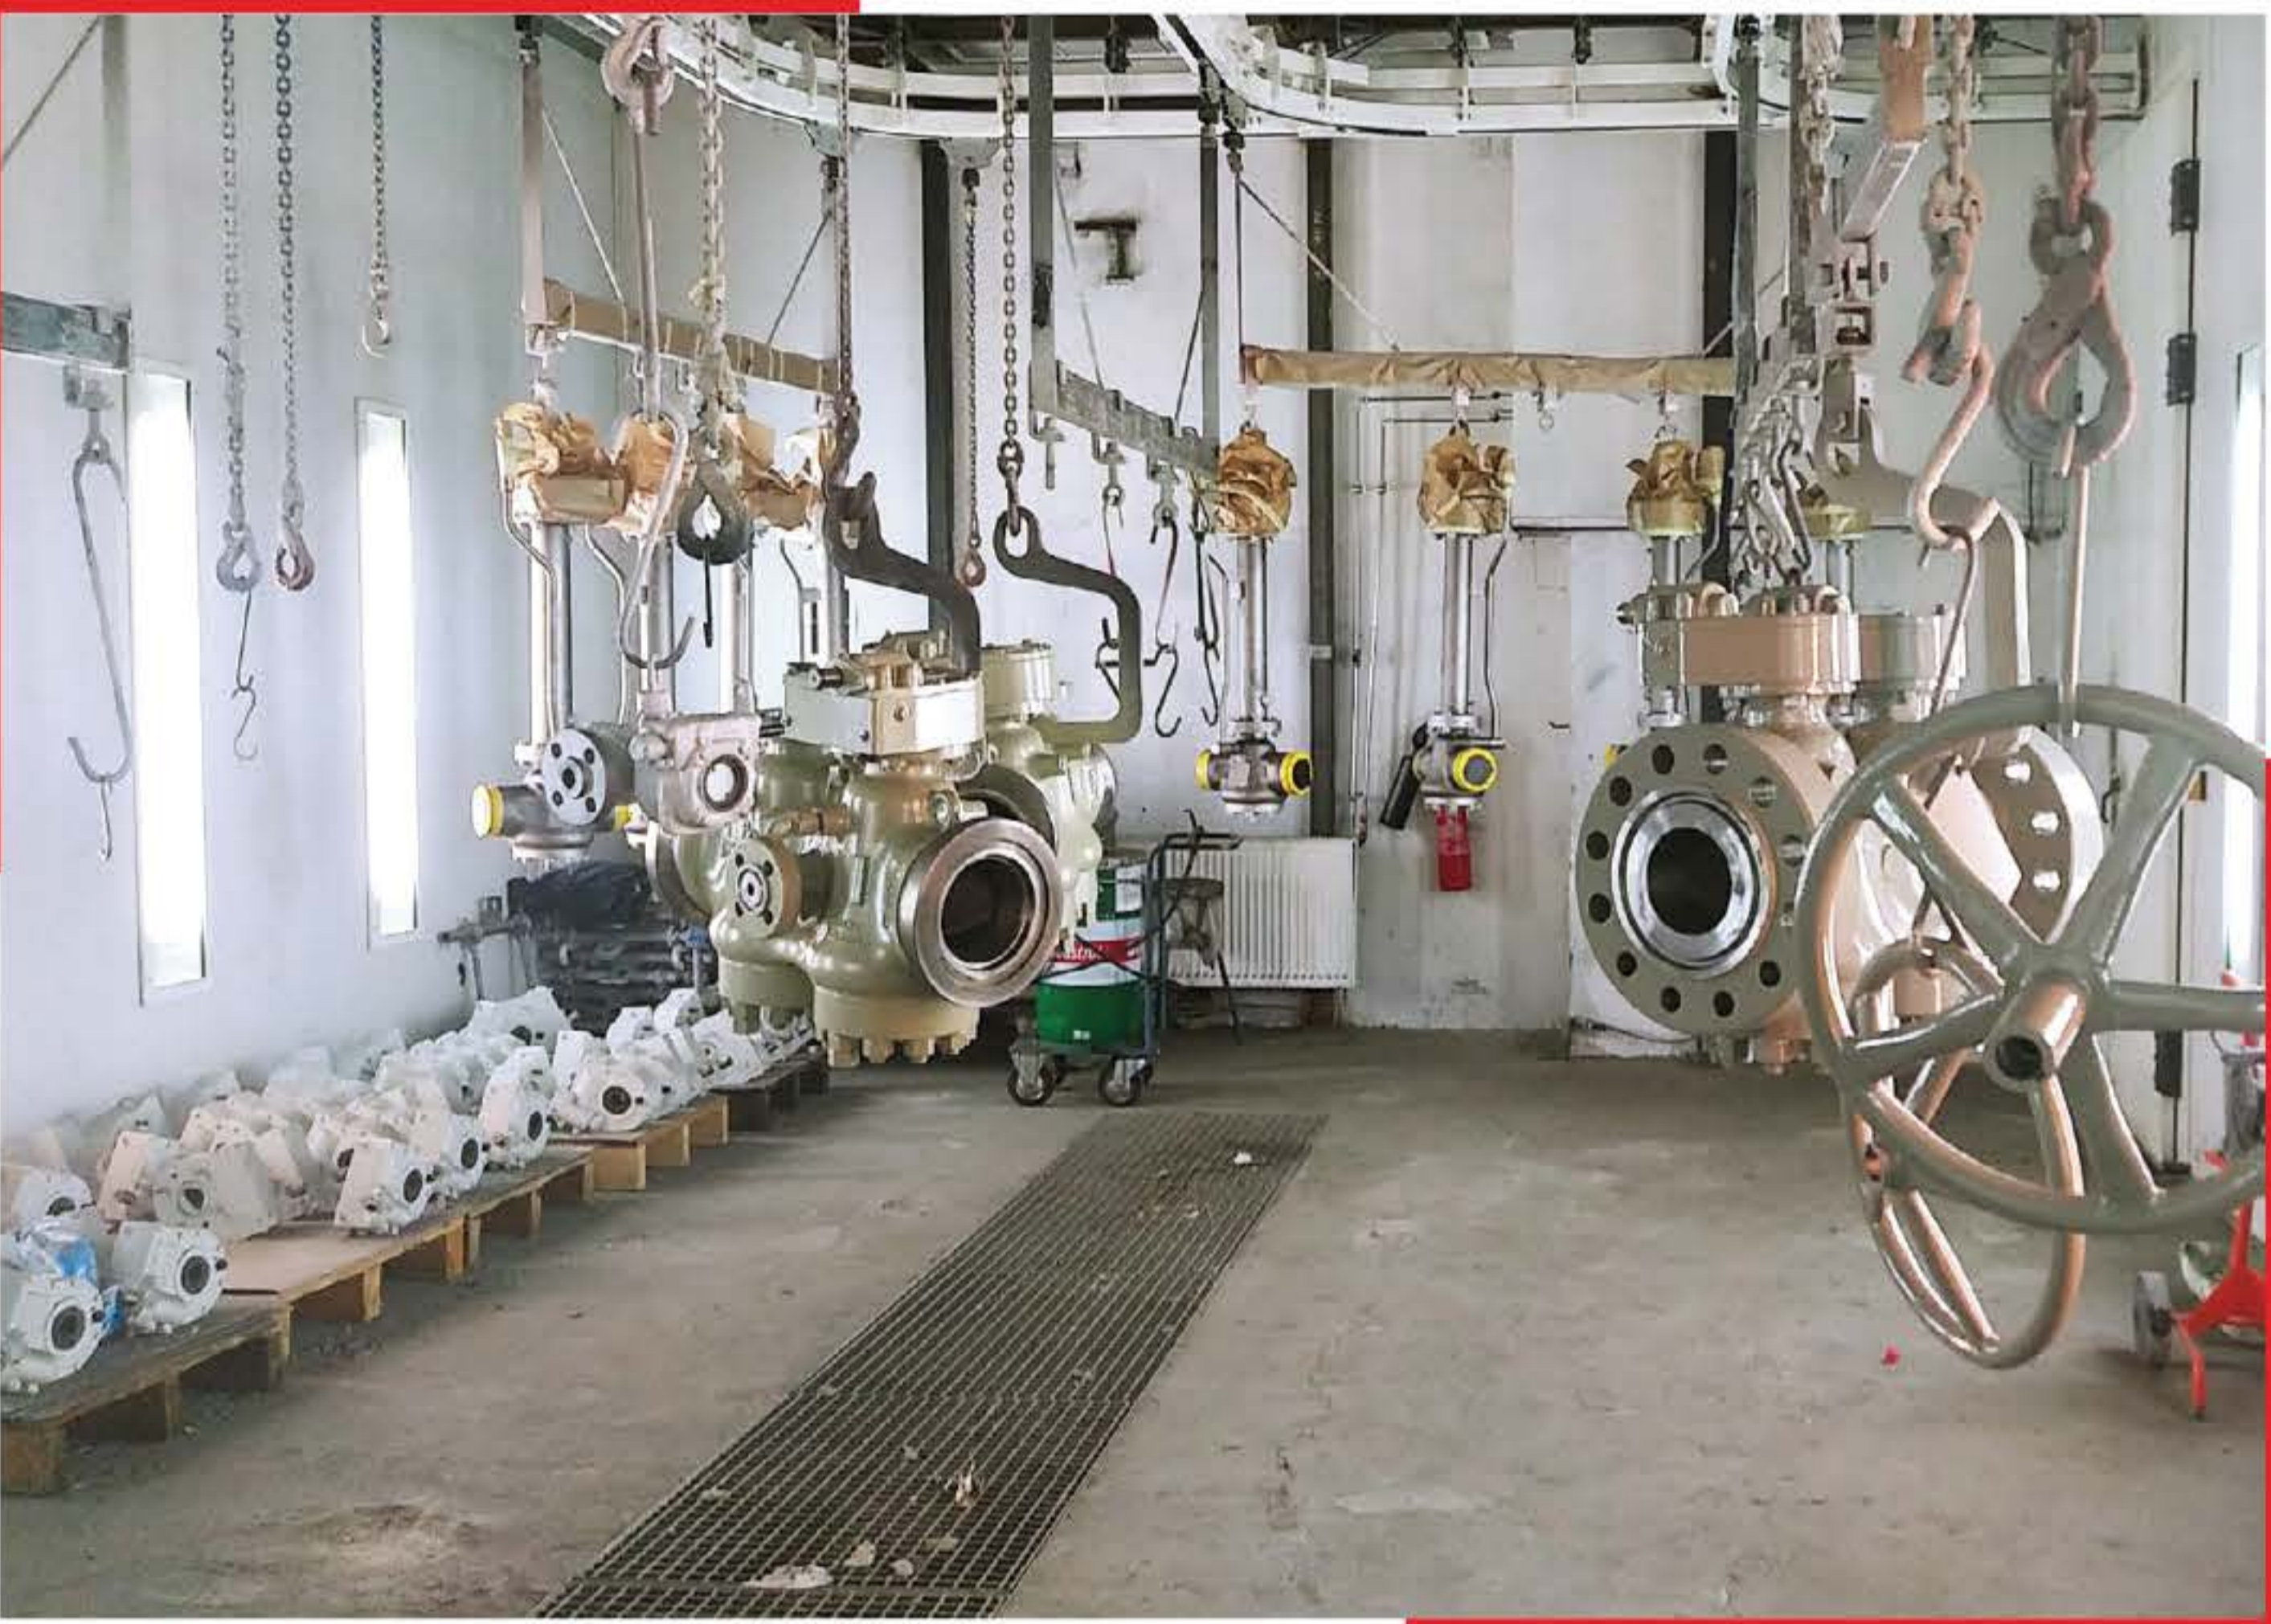

Capacity

- Over 16,000 sq. m. of manufacturing space
- Internal Pattern Shop
- Capacity of 10,000 valves per year
- CNC and conventional machining
- Full Destructive and Non-Destructive Laboratory
- ISO 9001:2015, PED and API Spec Q1 Quality Management System
- API 6D Monogram

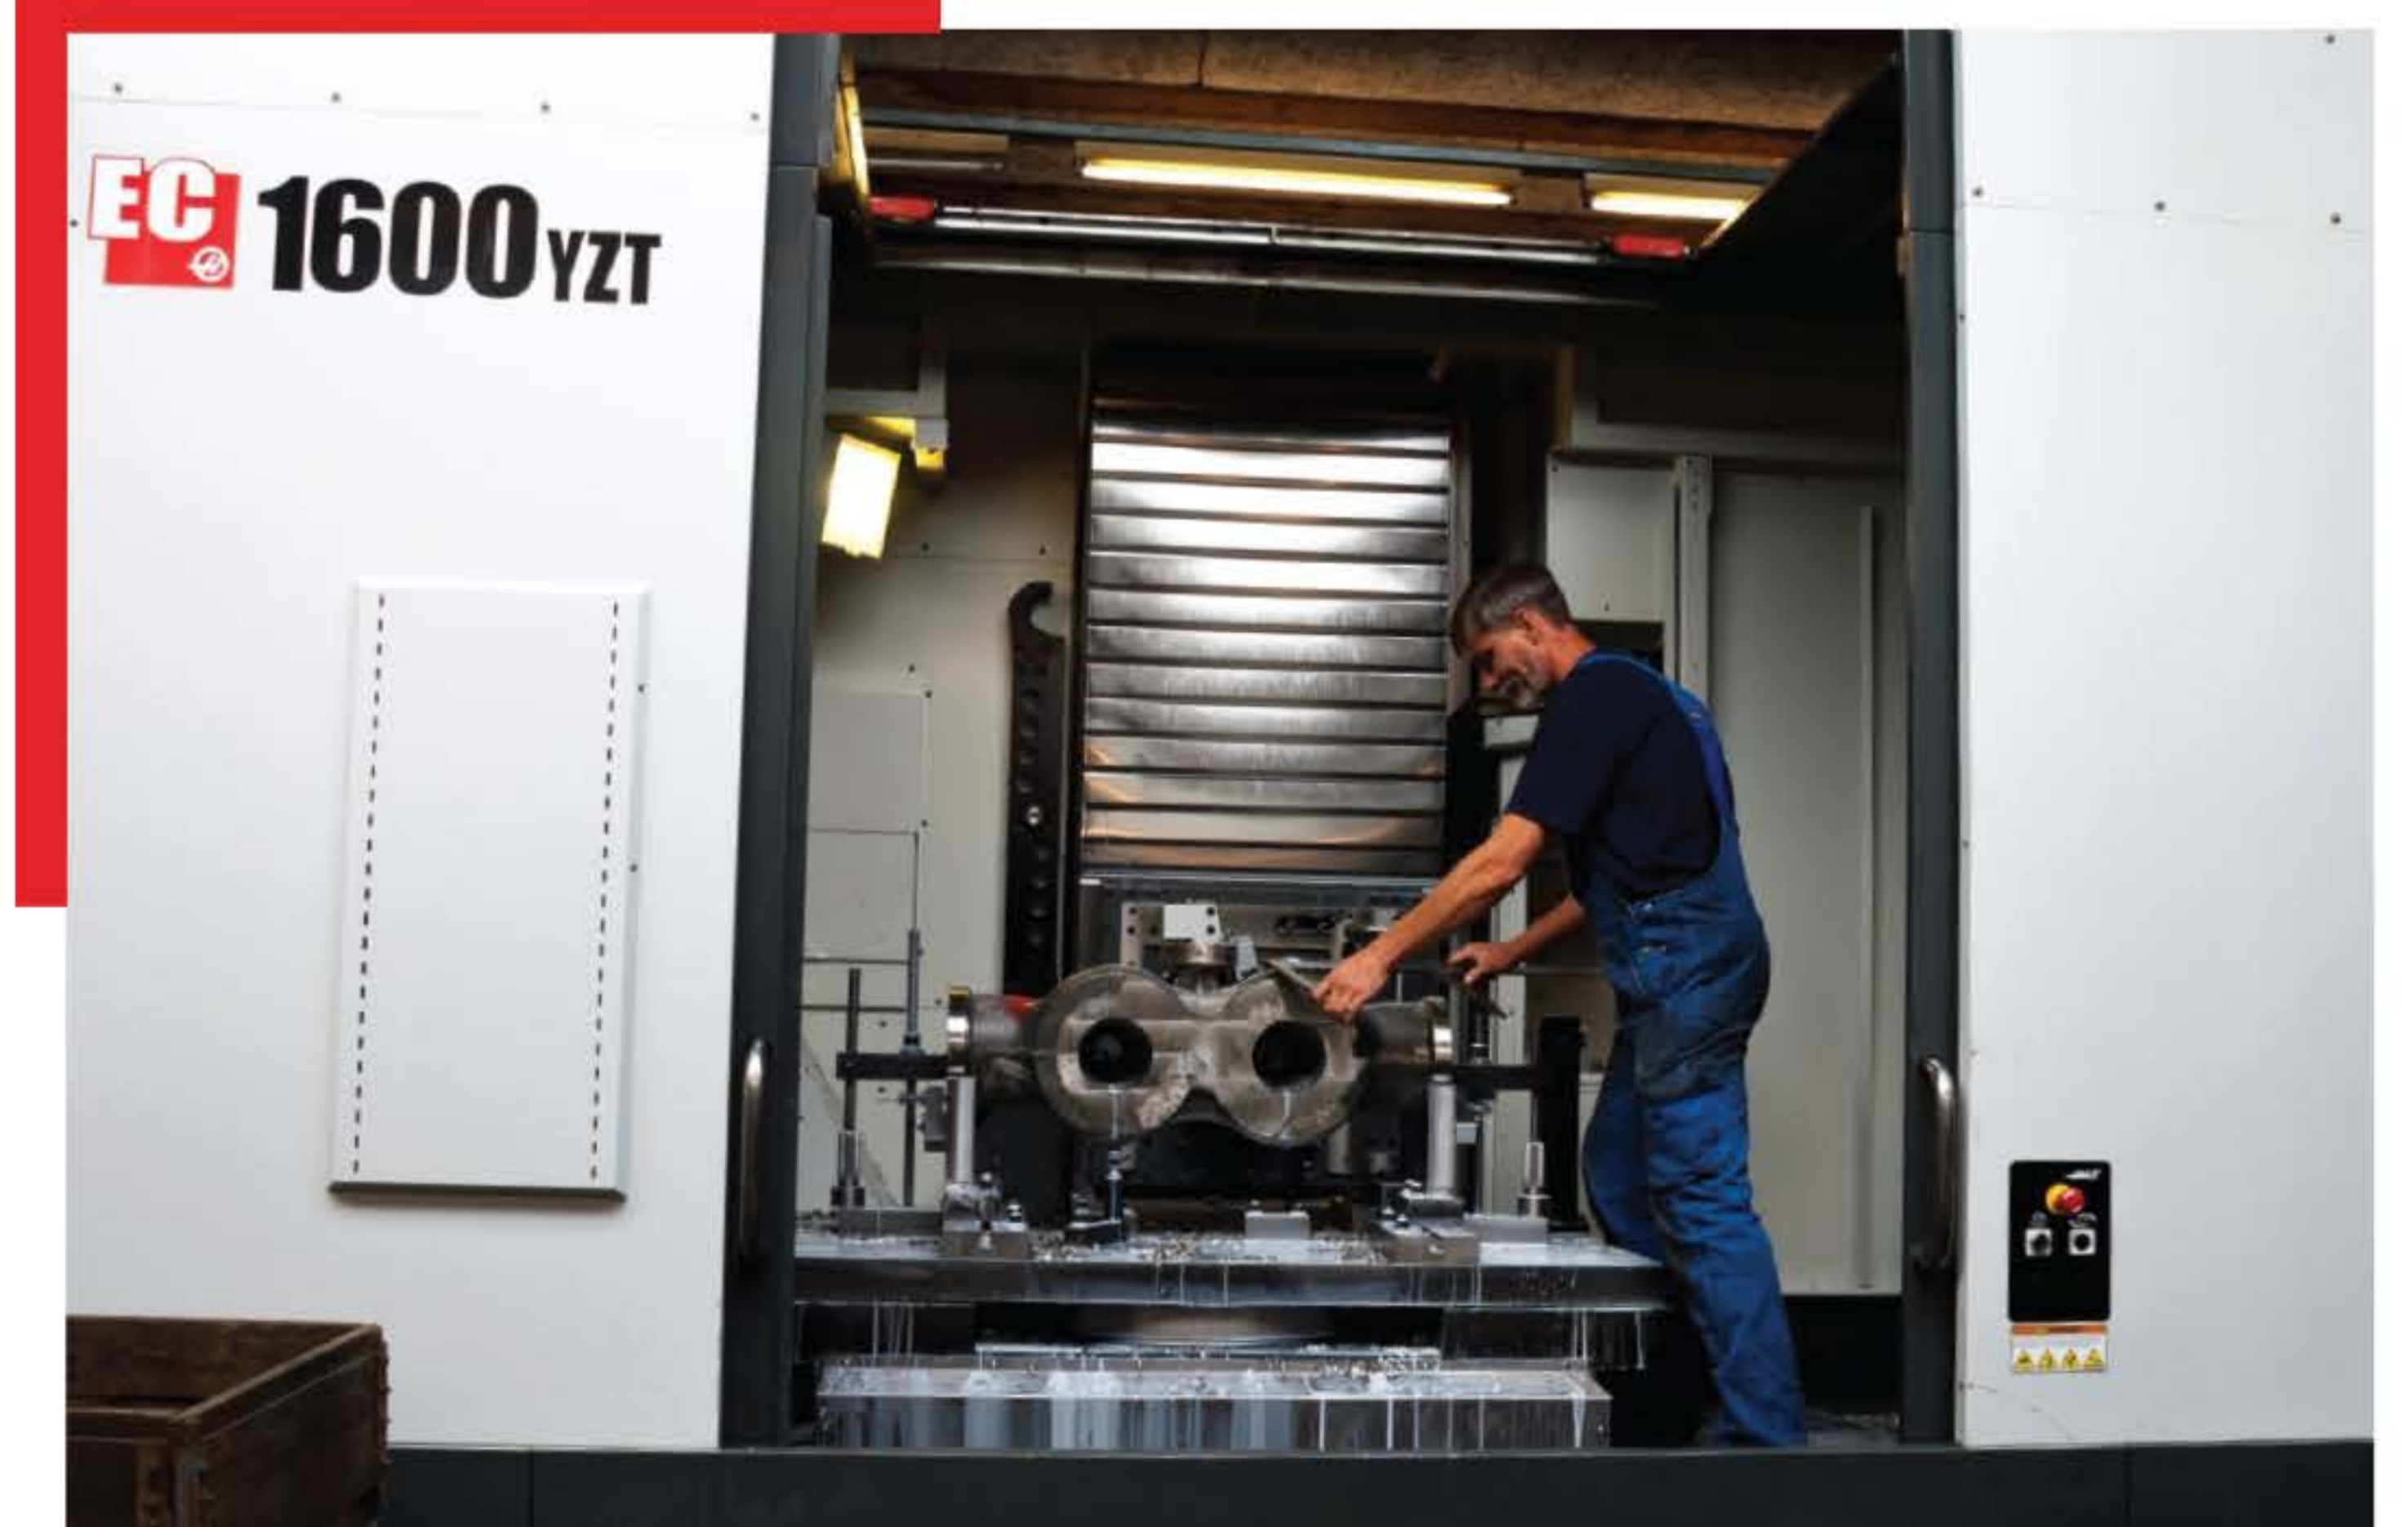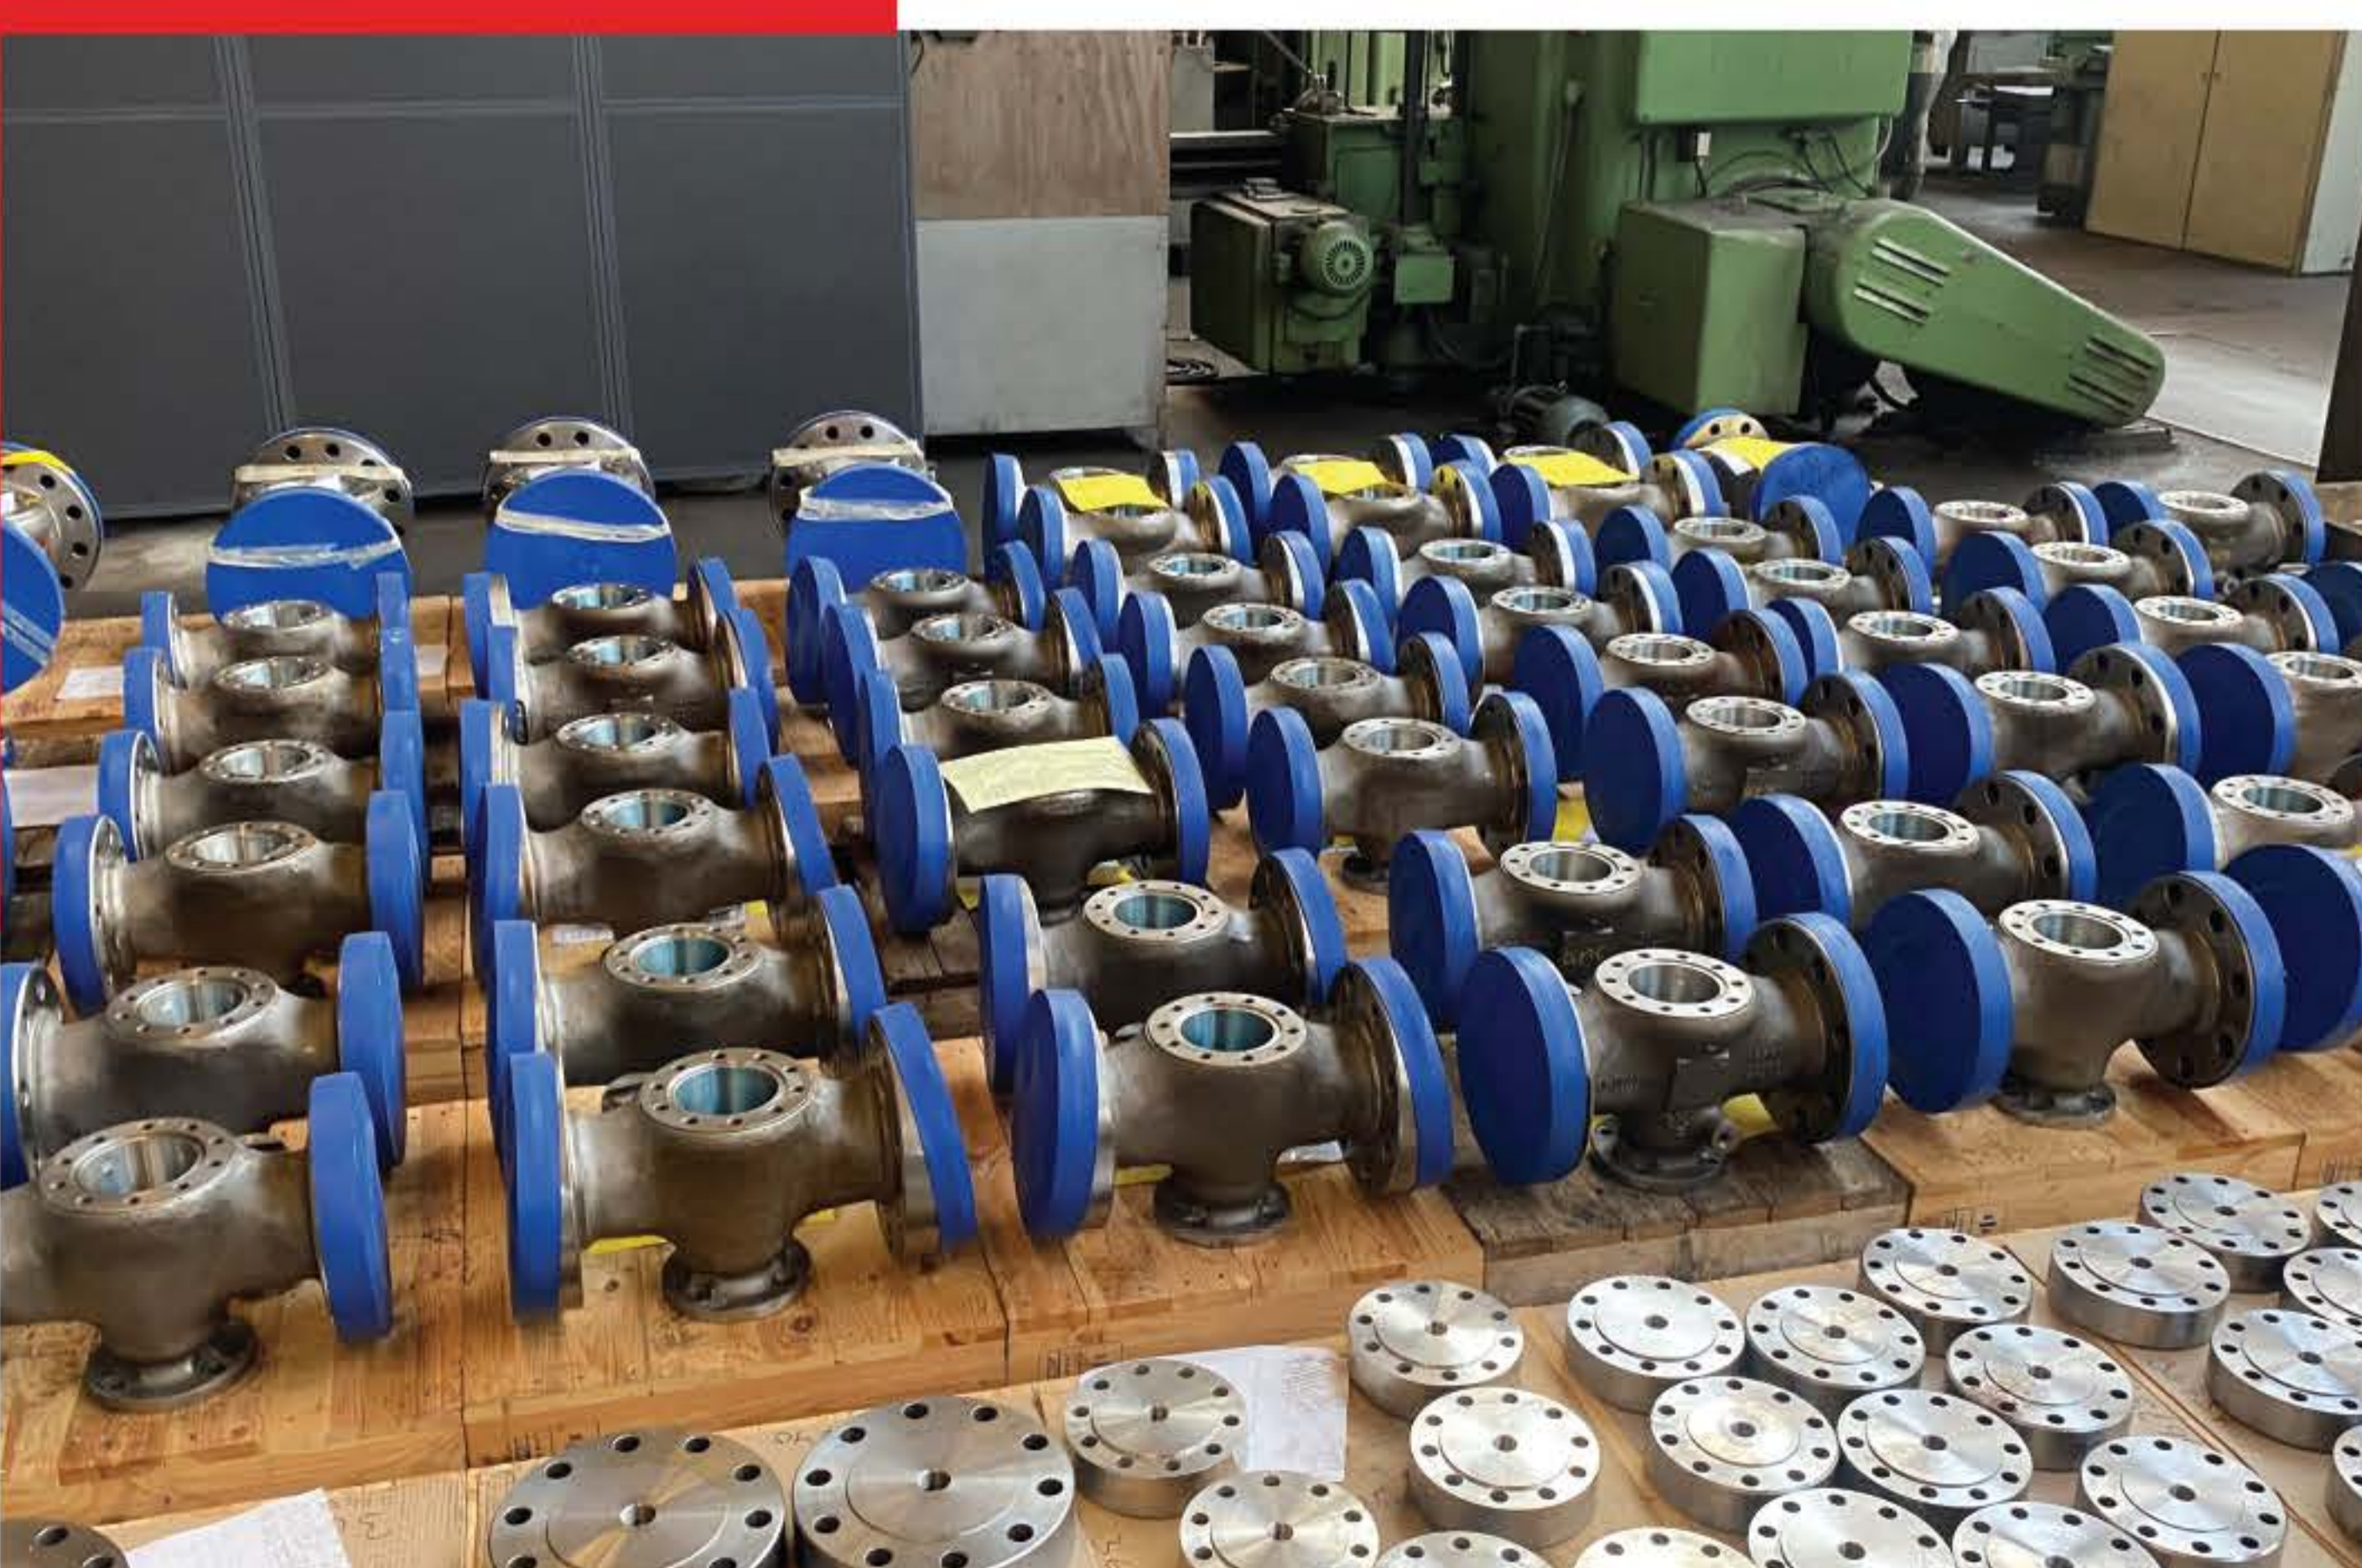

TYPE 5: PRESSURE BALANCED LUBRICATED TAPER PLUG VALVE

Key Features

- Trouble-free metal-to-metal sealing
- Blowout Proof Stem with three independent seals
- Pressure balanced and fire safe design
- Regular, Venturi or Short pattern
- Port Type: Rectangular, reduced or full port
- Limitless installation positions
- Low Torque

API/ASME/PED/EN/ISO/ATEX/NACE
1/2"-36" / DN 15 – DN 900
Class: 150/300/600/900/1500/2500
PN 20/50/100/150/250/420



TYPE 55: PRESSURE BALANCED LUBRICATED TAPER TWIN PLUG VALVE

Key Features

- Double Block and Bleed (DBB) and Double-Isolation and Bleed (DIB) capabilities
- Trouble-free metal-to-metal sealing
- Blowout Proof Stem with three independent seals
- Pressure balanced and fire safe design
- Venturi pattern
- Port Type: Straightway rectangular reduced
- Limitless installation positions
- Low Torque
- Cavity Relief System

API/ASME/PED/EN/ISO/ATEX/NACE
1"-24" / DN 25 – DN 600
Class: 150/300/600/900/1500/2500
PN 20/50/100/150/250/420



TYPE 9: TOP ENTRY LUBRICATED TAPER PLUG VALVE

Key Features

- Trouble-free metal-to-metal sealing
- Fire safe design
- Regular, Venturi or Short pattern
- Port Type: Rectangular, reduced or full port
- Limitless installation positions
- Low Torque

API/ASME/PED/EN/ISO/ATEX/NACE
1/2"-36" / DN 15 – DN 900
Class: 125/150/250/300
PN 10/20/40/50



TYPE 1: FOUR WAY – BOTTOM ENTRY LUBRICATED CYLINDRICAL PLUG VALVE


Key Features

- Trouble-free metal-to-metal sealing
- Regular pattern
- Port Type: Four way, rectangular double L-ported
- Limitless installation positions
- Adjustment free and blow out proof trim
- Low torque

API/ASME/PED/EN
1/2" – 30" / DN 15 – DN 750
Class: 125/150/250/300
PN 10/20/40/50



Major Certifications

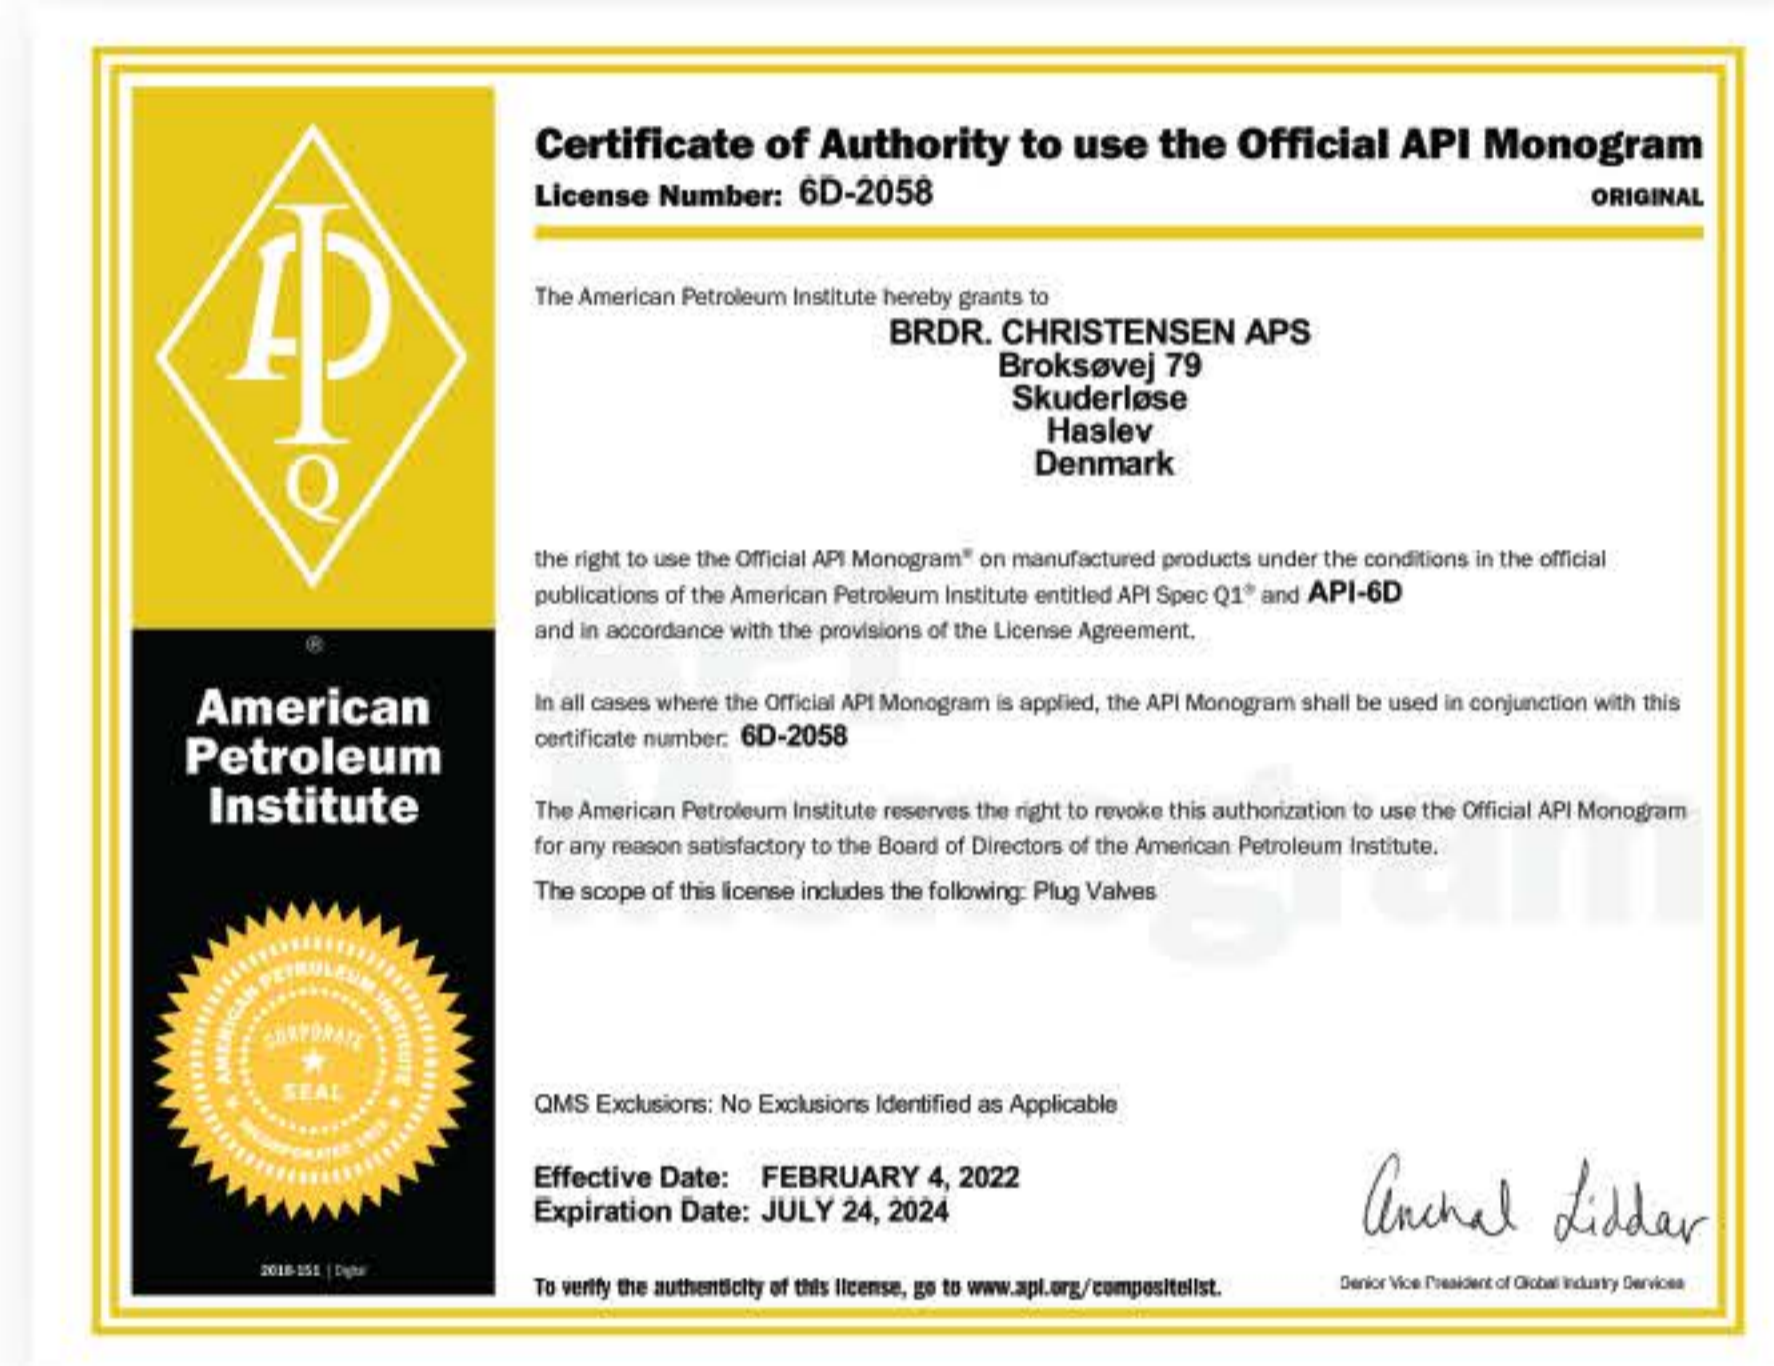

Major Customers



Creating quality valves worldwide



92B & 93B, Sector-5, IMT Manesar, Gurugram-122050, Haryana, India
 T: +91-124-4866950-99
 E-mail: tpv.sales@brdrchristensens.com



Visit website

A BLISS ANAND GROUP COMPANY